



Eclipse Hard Floor Sealer is a water-based acrylic formula sealer for concrete, stone and similar hard floor surfaces.

DIRECTIONS


Read all directions and Safety Data Sheets (SDS) before using.

1. Strip and properly neutralize the floor, allowing it to dry thoroughly.
2. Apply thin coats of sealer using a clean synthetic mop. Allow floor to dry thoroughly between coats.
3. Apply recommended floor coating, following manufacturer's instructions.

PRODUCT INFO

| | | | |
|-------------------------|-----------------|---------------|--------------|
| Product Code | 403FS | 403FSE | 403MPE |
| Volume | 2.50 US gallons | 10 liters | 4 liters |
| Shipping Package | 2 x 2.5 gallons | 2 x 10 liters | 4 x 4 liters |
| Pallet Quantity | 48 | 48 | 48 |

SURFACES

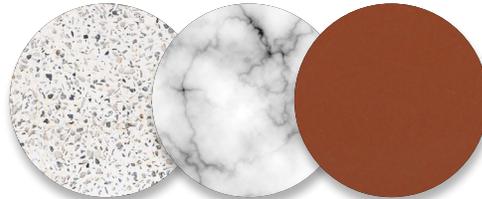

TERRAZZO

MARBLE

QUARRY
TILE

TECHNICAL DATA

| | |
|---|--|
| Description | Polymer emulsion |
| Appearance | Milky white |
| Viscosity (Brookfield) @ 68°F (20°C) | <10 centipoise |
| Coverage Rate | 1500 ft ² /gal first coat 37 m ² /l 2500 to 3000 ft ² /gal 61 to 74 m ² /liter |
| Dry Time | About 30 minutes |
| Removability ASTM D1792-06 | Semi-permanent |
| VOC 40 CFR Part 59 Subpart C | 7.02 % |
| Non-Volatile Solids ASTM D2834-95 (2008) | 19% |
| pH ASTM E70-07 | 7.8 |
| Fragrance | Slight solvent |
| Slip Resistance ULTM410 | Meets requirements |
| Shelf Life ASTM D1791-93 (2008) | 1 year |
| Density ASTM D1475-98 (2008) | 8.5 lb/gal @ 68°F 1.02 kg/L @ 20°C |
| Detergent Resistance ASTM D3207-92 (2008) | Excellent |
| Freeze/Thaw ASTM D3209-93 (2008) | Passes 3 cycles |
| Container | 2.5 US gal/9.5 L (FS packaging) 2.64 US gal/10 L (FSE packaging) 1.06 US gal/4 L (MPE packaging) |



Floor Coating and Finishing materials
as to slip resistance only. 42E6